

TOPPER TRUCK RACK INSTALLATION GUIDE



TOPPER
MANUFACTURING



OBSERVE LOAD LIMITS OF 750# FOR TRUCK RACKS.
SECURELY TIE DOWN ALL OBJECTS CARRIED ON RACK.
PERIODICALLY CHECK & TIGHTEN NUTS AND BOLTS.
DO NOT DRILL OR ALTER RACK IN ANYWAY.

WARNING

www.toppermfg.com

Made in the USA.


TOPPER FLOOR MOUNT TRUCK RACK INSTALLATION



Cut crossbars to size. Front and back crossbars are cut to 2 inches longer than the outside dimensions of the side rails. Middle crossbar is cut to 3 inches less than the inside dimension of the pick up truck box.

NOTE:
Middle crossbar must be inserted into the pockets of the uprights prior to securing them to the truck.

TOPPER OVER THE CAP TRUCK RACK INSTALLATION

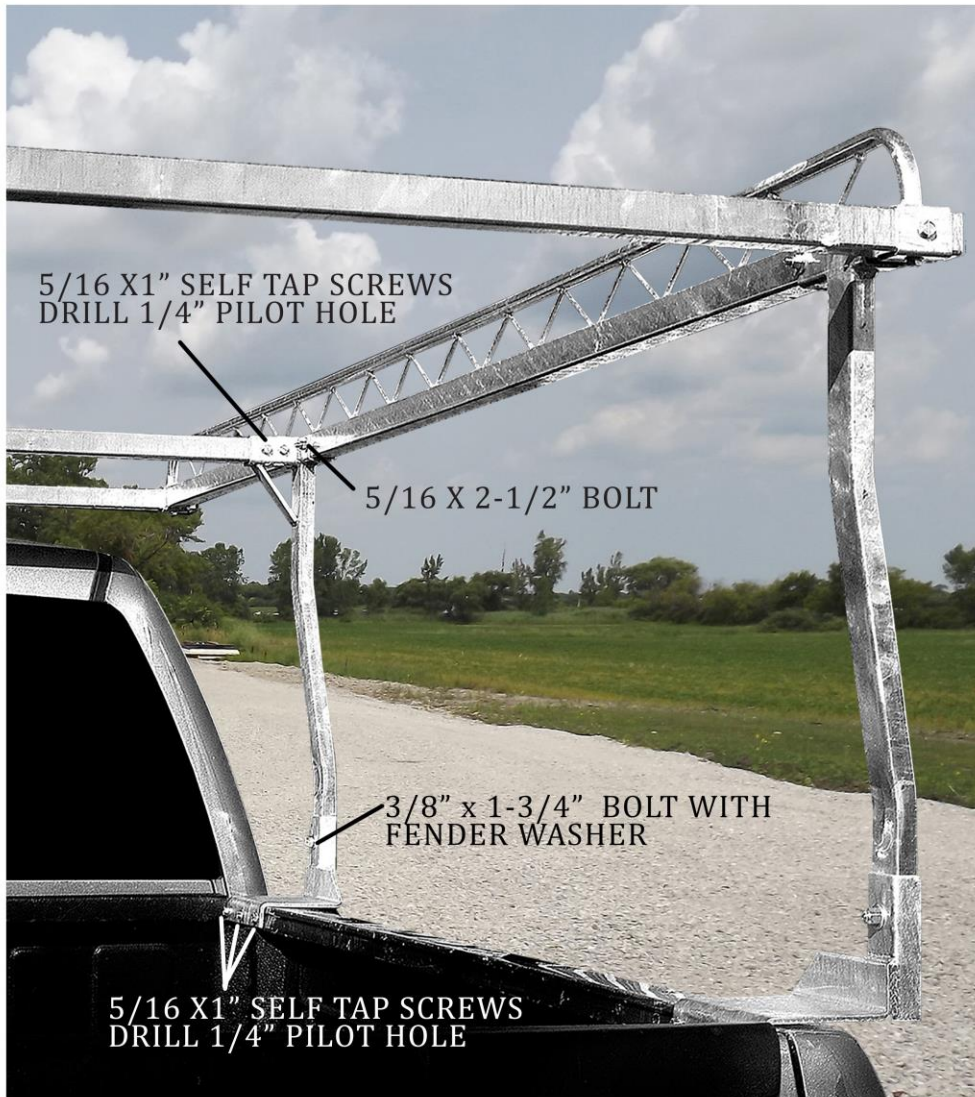


Cut crossbars to size. Front and back crossbars are cut to 2 inches longer than the outside dimensions of the side rails. For the middle crossbar measure the inside of the support plate, where the upright pocket is attached and subtract 2-1/2 inches. Insert the crossbar into pockets prior to securing both uprights.



www.toppermfg.com



(262) 886-6918



TOPPER
MANUFACTURING



info@toppermfg.com



facebook.com/TopperMfg



twitter.com/TopperVanRacks



[youtube.com/
TOPPERMANUFACTURING](https://youtube.com/TOPPERMANUFACTURING)



2052 Grove Ave.
Racine, WI 53405

Send us your TOPPER RACK pictures!
We'll share them on social media.
Email us at info@toppermfg.com